



Physically based indoor scene analysis

Microsoft
Research


PhD Summer
School 2012

MAX-PLANCK-GESELLSCHAFT

Elena Tretyak¹, Peter Gehler¹, Carsten Rother²


¹Max Planck Institute for Intelligent Systems Tübingen, ²Microsoft Research Cambridge

Problem Statement

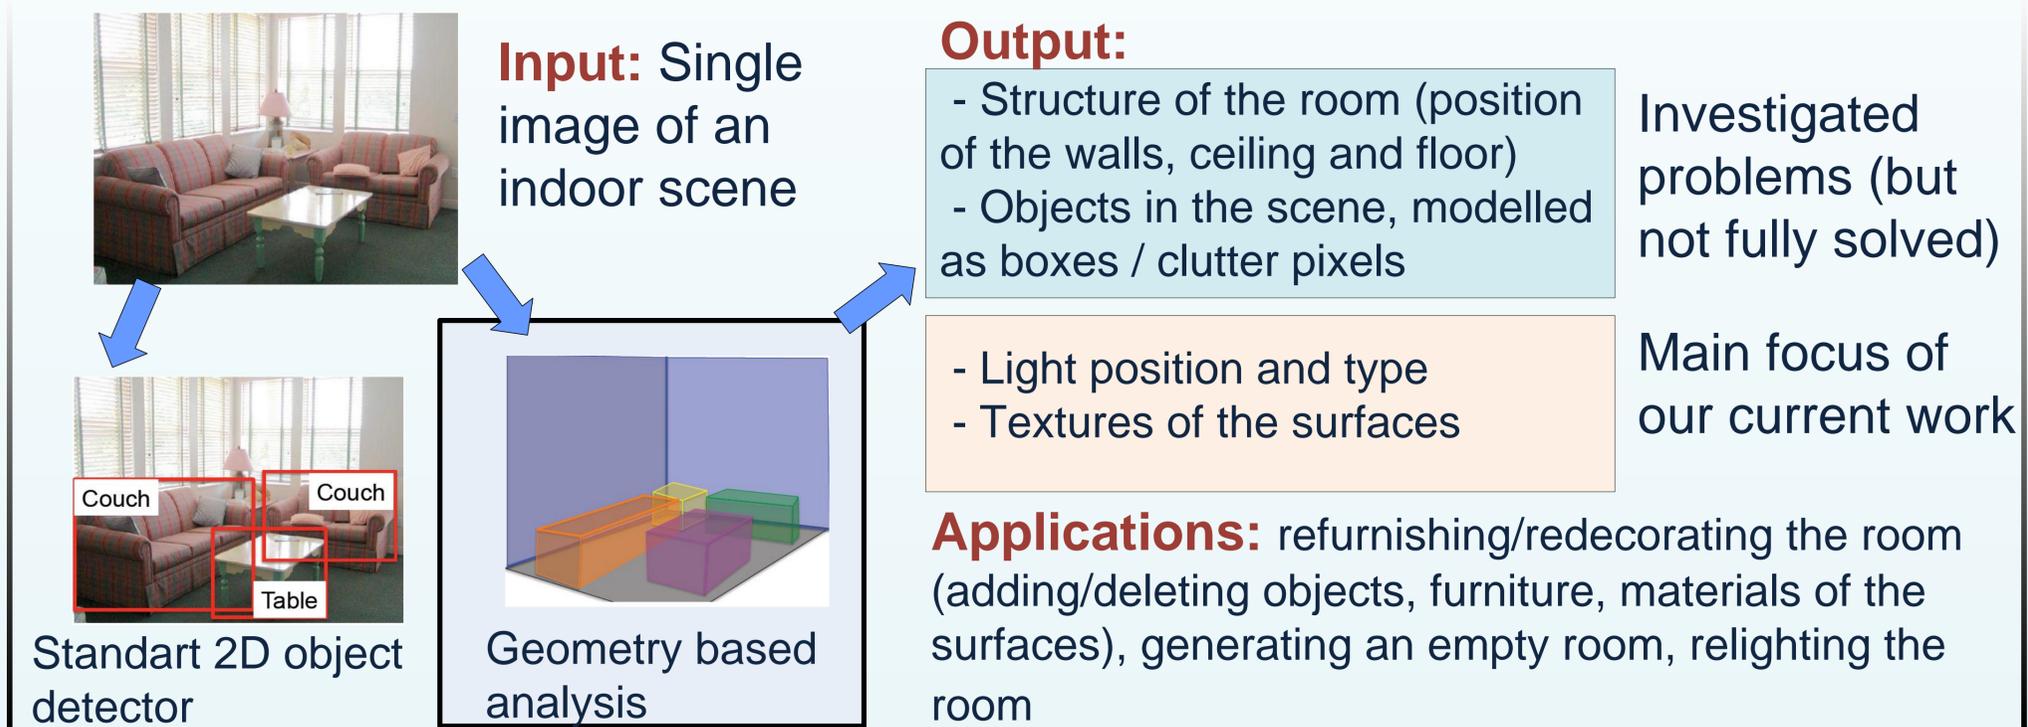

Estimating different physical components

Standard geometry model:

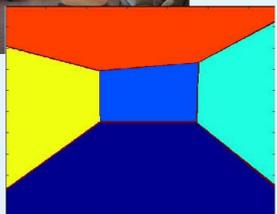

Room is represented as a box, each pixels is classified as left wall, right wall, middle wall, ceiling, floor (additionally: clutter), first proposed in Hedau et al. 2009

Light estimation:



Input Image



User Input: Geometry

(Karsch et al. 2011)



User Input: Initial position of the light



Automatically detected: Albedo




Output: position of the light

Experiments with artificial data:




Generated Input Image

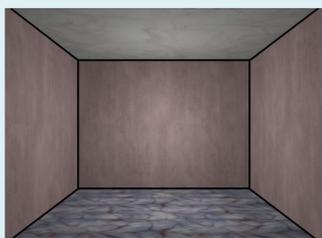


Known Geometry



Known Surfaces materials



Output: Position and type of the light (it's easy to compare to Ground truth)

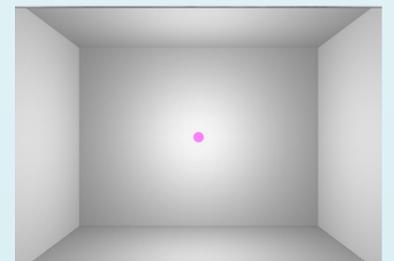

Intended result

Join all the elements into one model for the analysis of real images:

- 1) find pixels belonging to walls/ceiling/floor
- 2) estimate simultaneously geometry of the scene, material of the surfaces, light position

References

- . Rendering Synthetic objects into Legacy Photographs, K. Karsch, V. Hedau, D. Forsyth, D. Hoiem, Siggraph 2011
- . Recovering the spatial layout of cluttered rooms, V. Hedau, D. Hoiem, D. Forsyth ICCV 2009